


EVONNE METAL 12 LIGHT CHANDELIER

DESIGN # CTL1013

Assembly Instructions

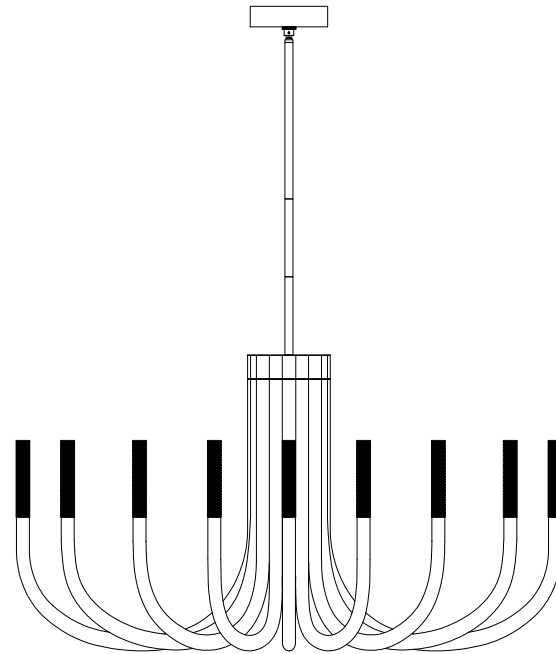

Need help?

Feel free to contact us via email or call
if you have any specific questions!

contact us:

cs@safavieh.com

866-422-9070

SAFAVIEH
C O U T U R E

**Thanks for bringing
Safavieh Couture into
your home**

Every thing we make is incredibly simple to set up, including your new table lamp. You won't need any additional tools

Parts List

Ax3




Hex nut

Bx1



Metal washer

Cx1



Threaded rod

Dx1




Teeth washer

Ex3



Wire Nut

Fx1



Mounting bracket

Gx2



Plain washer


Hx2



Outlet box screw


1

Fasten acrylic arm(R) to fixture body(Q).

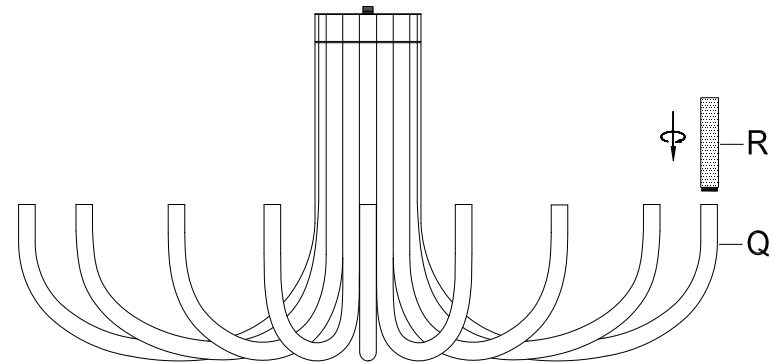

2


Pass wire and cable through 6"rod (O),12"rod (P),Loop Ring(J),Swivel joint (I), Canopy(N),Mounting bracket(F) and out from side hole of Cluster (M). Then fasten 6"rod (O),12"rod (P),Swivel joint (I).

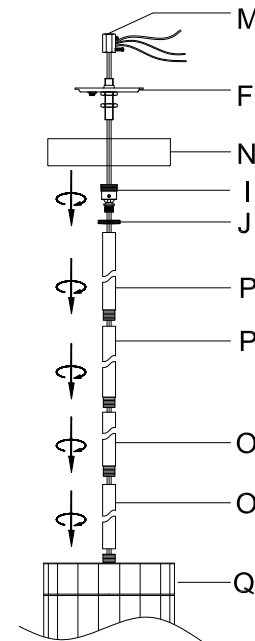

Thanks for bringing Safavieh Couture into your home


Every thing we make is incredibly simple to set up, including your new table lamp. You won't need any additional tools

Parts List

Ix1 Swivel joint	
Jx1 Loop Ring	
Kx1 Steel cable buckle	
Lx1 Steel cable buckle	
Mx1 Cluster	
Nx1 Canopy	
Ox2 6"rod	
Px2 12"rod	
Qx1 Fixture body	
Rx16 Acrylic bars	

3

Raise the threaded rod (C) thread to the cluster (M), then attach to the ceiling, secure with metal washer (B) and hex nut (A). Wrap the steel wire rope around the beam and lock it with the steel cable buckle (K) and (L). Tighten Mounting bracket (F) to Cluster (M), then fix Swivel joint (I) to Mounting bracket (F). Insert lead wire to quick-connect terminal, black to black, white to white by forcing apart the handle of quick-connect terminal (N1) to insert the wires and then loose, ensure the wires be inserted properly.

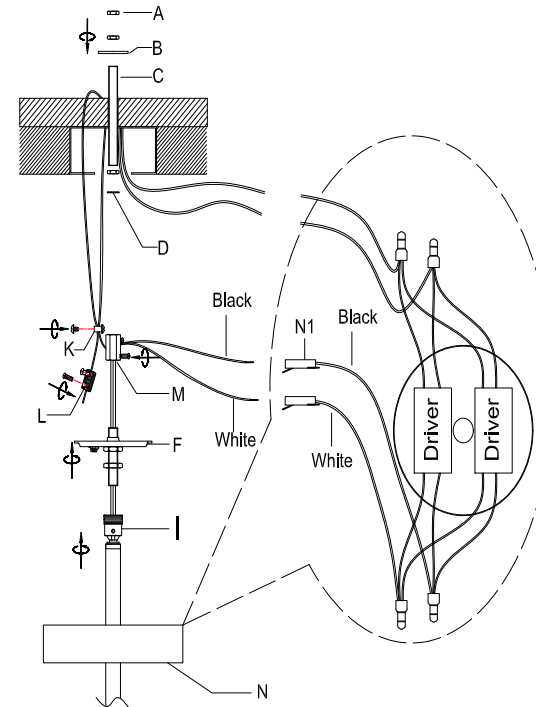



4 Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections inserted properly.

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

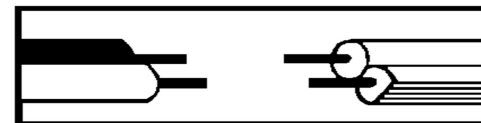


**Thanks for bringing
Safavieh Couture into
your home**

Every thing we make is incredibly simple to set up, including your new table lamp. You won't need any additional tools


5

Install the mounting bracket (F) to the junction box with plain washer (G) and outlet box screw (H).ground wire with a wire nut.

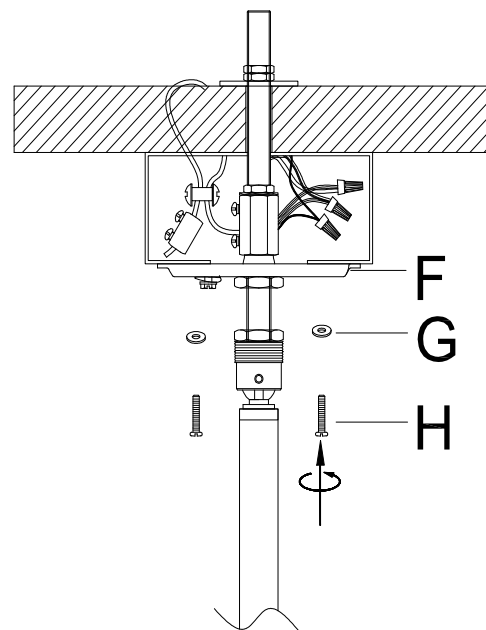

6

Attach the canopy (N) to the ceiling with Loop ring (J).

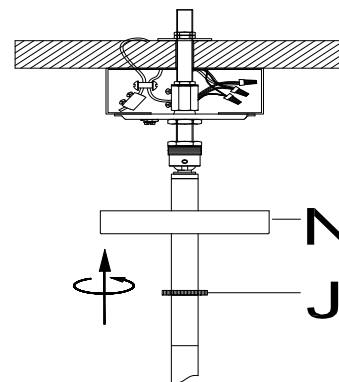

Dimmable drive can be compatible with the following 10 commonly used dimmers in the United States:	
Lutron DVCL-153P	Lutron MACL-153MLH-WH
Lutron P-PKG1W-WH-R	Lutron STCL-153PH-WH
Leviton R11-DSL06-1TW	Leviton R00-RNL06-0TW
Leviton R02-DW6HD-2RW	Leviton R68-06674-POT
Legrand RHCL453PNICCV4	TP-link HS220