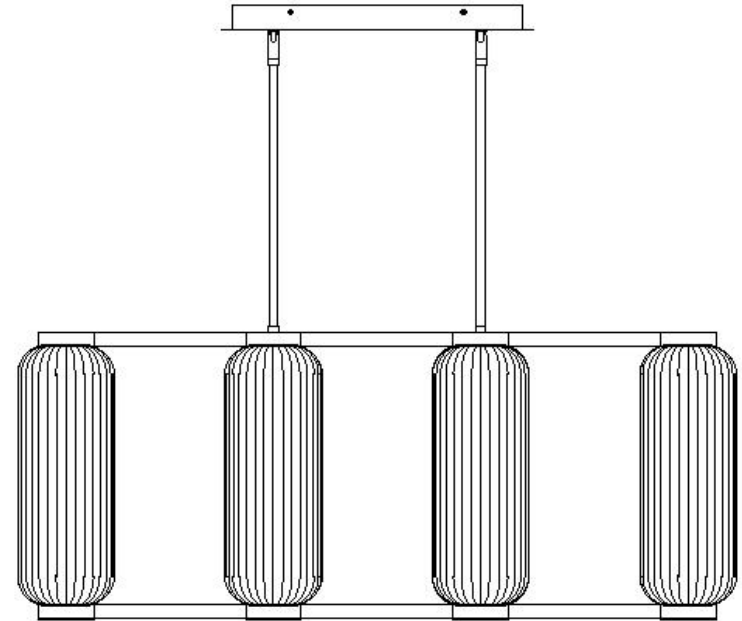


CYNDY RECTANGLE GLASS AND METAL CHANDELIER

DESIGN # CTL1119A

Assembly Instructions



Need help?

Feel free to contact us via email or call
if you have any specific questions!

contact us:

cs@safavieh.com





866-422-9070

SAFAVIEH
C O U T U R E

Thanks for bringing Safavieh Couture into your home


Every thing we make is incredibly simple to set up, including your new table lamp. You won't need any additional tools

Parts List

Ax1	
Mounting bracket	
Bx4	
Anchor	
Cx4	
Wood screw	
Dx1	
Canopy	
Ex2	
Swivel(E)	
Fx2	
6"rod	
Gx2	
12"rod	
Hx1	
Fixture body	
Ix6	
LED tube	


1

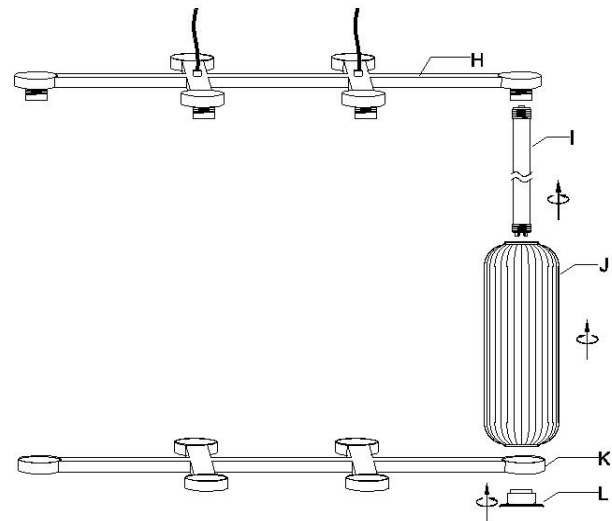Attach the LED tube(I), glass shade(J) to the fixture body(H),then fix the arms(K) to the LED tube(I) with iron sheets(L).



2


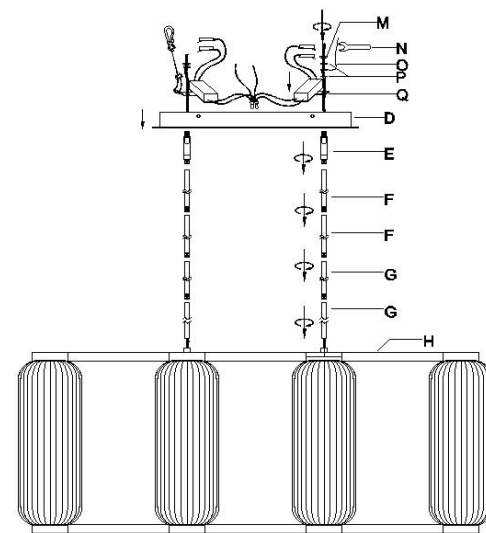
Pass wire and cable through 6"rod (F),12"rod (G),Swivel(E) ,Canopy(D),iron sheet & driver(Q),washer(P), earth wire(O), hex screw nut(M). Then fasten 6"rod (F),12"rod (G),Swivel(E), then attach Canopy(D),iron sheet&driver(Q),washer(P),earth wire(O),hex screw nut(M) to the swivel(E) and tighten by using spanner(N).



Thanks for bringing Safavieh Couture into your home

Every thing we make is incredibly simple to set up, including your new table lamp. You won't need any additional tools

Parts List


Jx6 Glass shade	
Kx1 Arms	
Lx6 Iron sheets	
Mx2 Hex nut	
Nx1 Wrench	
Ox1 Ground wire	
Px3 Washer	
Qx1 Iron sheet & driver	
Rx3 Wire Nut	

Dimmable drive can be compatible with the following 10 commonly used dimmers in the United States:

Lutron DVCL-153P	Lutron MACL-153MLH-WH
Lutron P-PKG1W-WH-R	Lutron STCL-153PH-WH
Leviton R11-DSL06-1TW	Leviton R00-RNL06-0TW
Leviton R02-DW6HD-2RW	Leviton R68-06674-POT
Legrand RHCL453PNICCV4	TP-link HS220

3

Determine the position for the mounting plate (A) and mark the location holes. Drill a hole at each marked position, and insert an anchor (B) into each hole and secure it with wood screw (C). Attach the mounting plate (A) to the junction box with outlet box screw (N). Attach the hang buckle from the canopy to the mounting bracket (A), Slip the red lead wire into the terminal of the red driver line, and black lead wire one into the terminal of the black driver line;



4 Wire connection

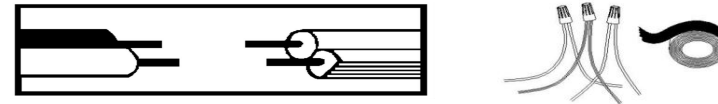
Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections inserted properly.

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.



5

Attach the Canopy (D) to the mounting plate (A) with mounting screw (O).

